




ARCO

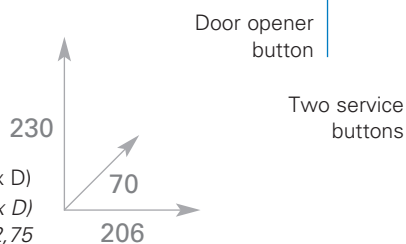

Dimensions mm (H x W x D)
 Dimensions in (H x W x D)
 9,05 x 8,11 x 2,75

Door opener
button

Two service
buttons

- Very easy to use
- Robust and ergonomic
- Integrated hearing aid setup



Arco is the new Urmet b/w video door phone with 4.5" display. Simple style is combined with extreme simplicity: icons are arranged by the side of the buttons for user-friendly use. In addition to the door opener button there are two buttons for secondary services and the mute function is mechanically controlled and indicated by the red button which appears on the lever. Ideal for who wants to evolve a video door phone system containing costs and choosing an item with streamline, discreet design.

ARCO AND SYSTEM COMPATIBILITY TABLE

Bibus VOP	Digivoice	Coax	5 wires
-----------	-----------	------	---------




ARCO mod. 1715



1715/1



1705/954



1715/50



1732/41 - 1332/1



1732/1



1750/32

1715/1	Arco b/w video door phone	Dimensions (W x H x D) 206 x 230 x 70 mm
1715/17	Arco b/w video door phone	Compatible with european standard for use with hearing aid
1715/18	As 1705/17 but 60 Hz	

SYSTEM BRACKETS

Code	Bibus VOP	Digivoice	Coax	5 wires
1705/954	●	-	-	-
1705/92	-	●	-	-
1705/90	-	-	●	-
1705/955	-	-	-	●

ACCESSORIES

1715/50	Table-top kit for door phones, transparent Plexiglas	Provided with socket and 1.5 m long wire without bracket. Dimensions (W x H x D) 162 x 222 x 185 mm
9854/52	Supplementary electronic buzzer	Power: 12Vcc; calling consumption 60mA.
9854/53	Floor call add-on device	Power: 12Vcc; calling consumption 60mA.
1705/100	Plastic support for retrofitting with Sentry	Recover the electronic board from the bracket and replace it with the plastic support.

SCAITEL RANGE

1732/41		Scaitel 4" color video module, for 50Hz system, white	Scaitel video module designed by Architect Giugiaro for use in combination with 2Voice switch-board, Digivoice. Supplied without bracket. Dimensions: 167 (W) x 220 (H) x 60 (D) mm.
1732/1**		As 1732/41 but B/W	

SCAITEL BRACKETS COMPARISON TABLE

Code	2Voice	Bibus VOP	Digivoice	Coax	5 wires	Notes
1732/955	-	-	-	-	●	Carriage shift for system connection
1732/91	-	-	-	●	-	Carriage shift for system connection
1732/957	-	●	-	-	-	To be placed next to ref 1072/42 switchboard
1732/92	●	-	●	-	-	It allows to place the video module next to the switchboard

SCAITEL TELEPHONE ACCESSORIES

1732/56**	Table mounting kit for video module without bracket, white
1032/59**	Kit of plates for assembling Scaitel modules
1750/32**	Thirty-two image memory module, white

For hearing impaired. ** Contact the sales network for availability. ● Yes.