




4" BLACK AND WHITE ATLANTICO VIDEO DOOR PHONE



ATLANTICO VIDEO DOOR PHONE

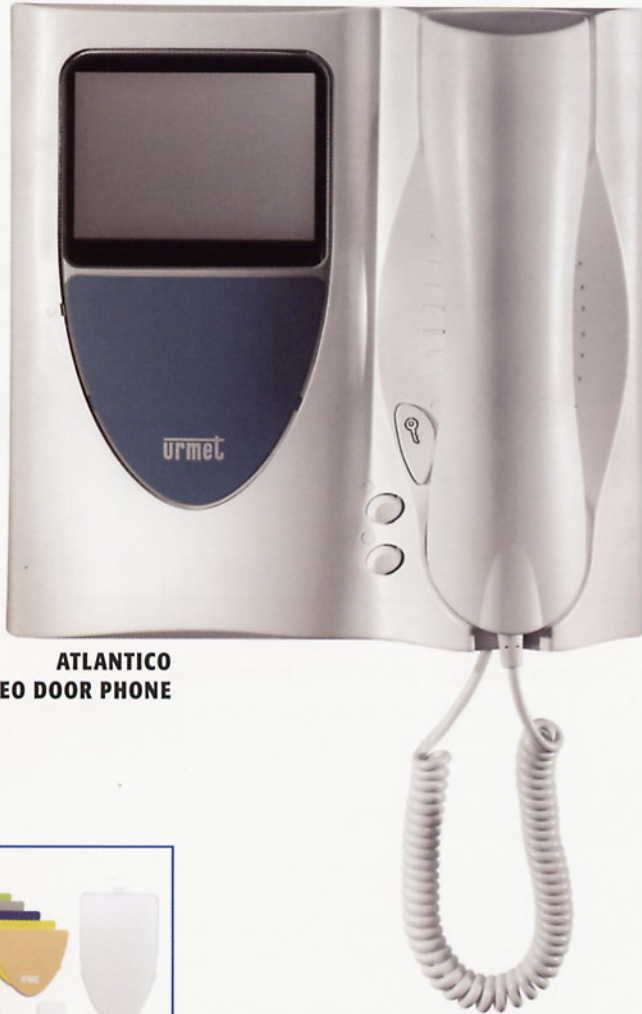

MASK-KIT



DOOR OPENER BUTTON

Urmet **Atlantico** is modern, streamline, electronic video door phone designed by Michele De Lucchi.

It ensures simple and rapid installation and can be arranged either on walls or tables using the specific optional table-top transformation kit.

The **Atlantico** video door phone has a flat 4" screen and thanks to this minimal depth can be installed directly on a wall without problems of flushing.




The video door phone can be customised by replacing the standard blue mask with one of the five masks contained in the 1702/50 kit.



FEATURES

The most important features of the Atlantico 1702/1 video door phone are compact size, ergonomic grip handset and easy installation.

The electronic call signal is sent to a supplementary speaker arranged under the handset.

The video door phone can be used in all electronic call systems in combination with Sentry+ monitors and 1132 and 1133 door phones.

The call volume can be adjusted by a trimmer (mute-low-high). A red tab appears under the device when the call tone is muted. In addition to releasing an electrical lock by pressing the green backlit key button , the unit can be used to manage various supplementary services (staircase lights, supplementary electrical lock) using the two buttons ( and ) on the video door phone.

Contrast () and brightness () can be adjusted by means of two trimmers arranged underneath the device.

The monitor is supplied without wall fastening bracket.

Various brackets are available for connecting Atlantico video door phones to analogue systems with or without coax cable, to V.O.P. Digivoice digital systems and two 2-wire video systems. The video door phone uses Winflat monitor brackets without add-ons.

Intercommunicating video door phone systems can be made with up to nine devices connected using a 1702/86 special bracket with six buttons, a switch and two LEDs or 1082/96 add-on 1702/82 bracket for digital 2-wire systems.

The LEDs can be set up to indicate various conditions, for example door open and call diversions. The switch can be used to divert the call to another device.

A switch is found on the back of the video door phone for using the monitor in analogue systems (position A) or V.O.P. and Digivoice digital systems (position B).


A 9854/52 buzzer can be added to the bracket for differentiated floor calls.

ATLANTICO.
Electronic video door phone.
The added value of design.

urmet

ATLANTICO - Electronic video door phone

DIMENSIONS

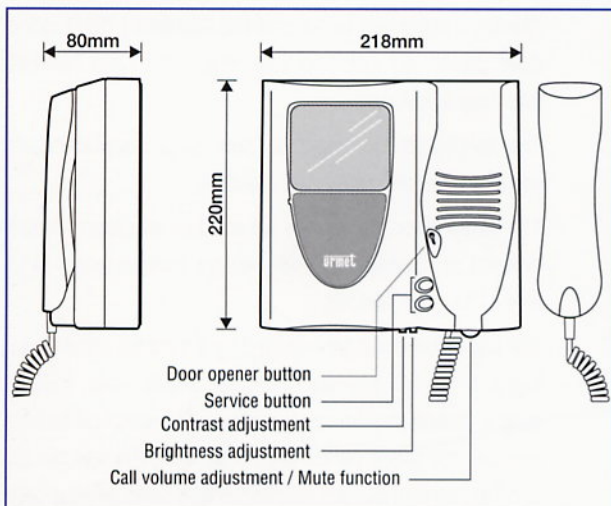

Note: No flush-mounting box is required for installation.

HIGHLIGHTS



TECHNICAL SPECIFICATIONS

Power voltage:	16 ÷ 18,5 Vcc	
Consumption:	Working:	max. 0,35 A
	Stand-by:	0 A
Working power:	max. 6,5 W	
CCIR version:	Vertical freq.:	50 Hz ± 2 Hz
	Horizontal freq.:	15625 ± 300 Hz
Video signal:	1 Vpp 75 Ω nominal 1 Vpp -6 dB minimum	
Kinescope:	4" flat 13 mm neck	
Phosphorous:	P45	
Screen size:	81 x 59 mm	
Geometric distortion:	vertical:	5% max.
	horizontal:	5% max.
	barrel:	10% max.
Brightness:	170cd/m2 max. setting	
Switch-on delay:	4 sec. max.	
Transmitting capsule:	electret microphone	
Receiving capsule:	45Ω speaker	
Button voltage:	24 Veff. max.	
Button current:	1,2 Aeff.	
Working temperature range:	-5° + +50° C	
Max. humidity:	90% RH	

DEVICES AND ACCESSORIES

UTD 1702/1 Atlantico monitor with door opening button and 2 service buttons
White ABS plastic container size (WxHxD): 218 x 220 x 80mm.

ACCESSORIES

UTD 1202/954	V.O.P. digital system bracket
UTD 1202/955	Bracket For 5-wire systems without coax cable
UTD 1202/90	Bracket For systems with coax cable
UTD 1202/591	Bracket for replacing Ranger video door phone For use in 5-wires systems
UTD 1202/590	Bracket for replacing Ranger video door phone For use in coax systems
UTD 1202/95	Bracket with privacy device for coax cable systems
UTD 1702/86	Add-on with 1 switch, 2 LEDs and 6 buttons with bracket
UTD 1082/96	Button add-on for 2-wire video systems "2 GO!"
UTD 1702/82	Wall bracket for 2-wire video systems "2 GO!" kit
UTD 1702/92	Monitor table-top kit without add-on
UTD 1132/54	Three-tone gong kit for Atlantico monitor
UTD 9854/52	Supplementary electronic buzzer
UTD 1702/50	Five coloured mask kit
UTD 9854/53	Floor call add-on device Module to be inserted in bracket. Two-tone call

SPARE PARTS

UTD 1702/101 Handset for Atlantico video door phones and door phones

Urmet Domus S.p.A. reserves the right to change the features of the illustrated products. This publication is not contractually binding.

Call Center
011.23.39.801

1st edition April 2004



Sistema qualità aziendale certificato
UNI EN ISO 9001 : 2000

URMET DOMUS S.p.A.
Via Bologna, 188/C 10154 Torino
Tel. +39-011-2400000
Fax +39-011-2400300
info@urmetdomus.it • www.urmetdomus.com

urmet